

KA2206B (6V)


STEREO AUDIO AMPLIFIER

DESCRIPTION

The KA2206B is a monolithic integrated consisting of a 2-channel poweramplifier. It is designed for portable cassette players and radios.


FEATURES

- * Higher output power
Stereo: $P_o=1.6W(Typ.)$ at $V_{cc}=6V, R_L=4\Omega$
Bridge: $P_o=3.5W(Typ.)$ at $V_{cc}=6V, R_L=8\Omega$
- * Low voltage distortion at high frequency
- * Small shock noise at the time of ON/OFF due to a built-in muting Circuit.
- * Closed loop voltage gain fixed 45dB(Bridge: 51dB) but available with external resistor added)



HDIP-12

BLOCK DIAGRAM

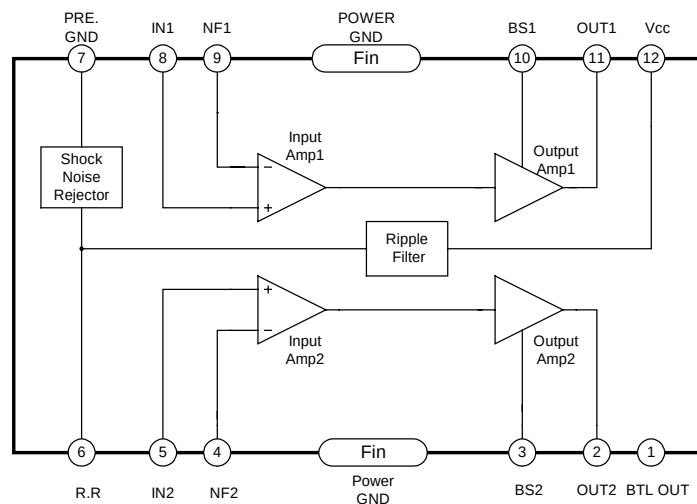

KA2206B (6V)

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Value	Unit
Supply Voltage	V _S	9	V
Power Dissipation(note)	P _D	4	W
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-40~+150	°C

NOTE: Fin is soldering on PCB.

ELECTRICAL CHARACTERISTICS

(T_{amb}=25°C, V_{CC}=6V, f=1kHz, R_g=600Ω, Unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Supply Voltage	V _S			6	9	V
Quiescent Current	I _Q		—	40	50	mA
Voltage gain	A _v	Stereo, V _{in} = -45dBm	43	45	47	dB
		Bridge	49	51	53	
Channel balance	CB	Stereo	-1	0	+1	dB
Voltage gain difference	ΔA _v		—	—	±1	dB
Input impedance	R _i		—	30	—	kΩ
Output Power	P _O	Stereo, R _L =4Ω, THD=1 0%	1.7	1.6		W
		R _L =8Ω, THD=1 0%		1.1		
		Bridge, R _L =8Ω, THD=1 0%		3.5		
Total Harmonic Distortion	THD	Stereo, P _O =250mW, R _L =4Ω		0.3	1.5	%
		Bridge	-	0.5	-	
Input Resistance	R _i		21	30		kΩ
Ripple rejection ratio	RR	Stereo, R _G =0, V _r =150mW, f=100Hz	40	46		dB
Cross-Talk	C.T.	R _G =10kΩ; V _O =0dBm	40	55	-	dB

APPLICATION INFORMATION


1. Stereo application

1). Fixed voltage gain(pin 4/9 connected to GND directly)


$$G_v = 20 \cdot \log(R_2/R_1) \text{ (dB)}$$

2). Variable voltage gain(refer to the right figure).

$$G_v = 20 \cdot \log[R_1/(R_2 + R_f)] \text{ (dB)}$$

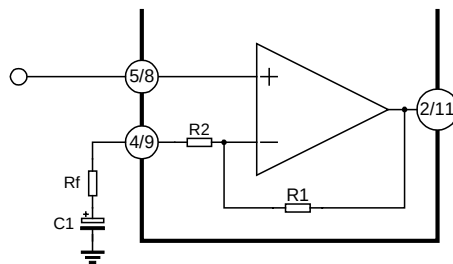

2. Bridge application

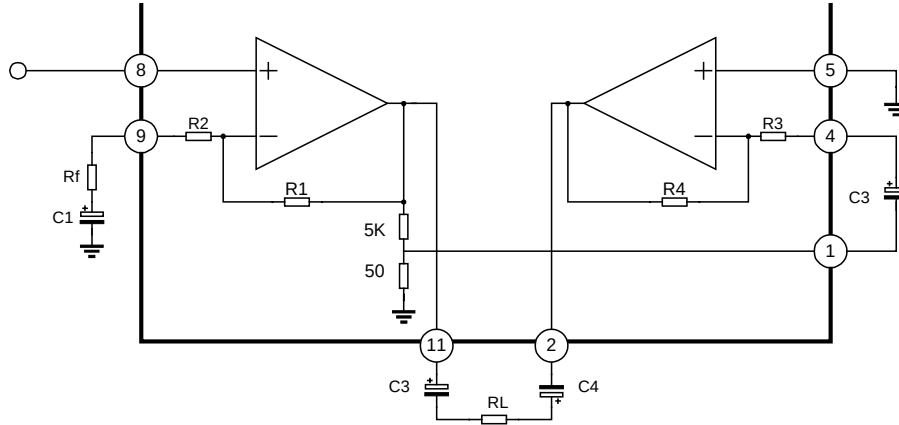

1). Fixed voltage gain (pin 4/9 connected to GND directly)
 $G_v = 20 \cdot \log(R_2/R_1) + 6 \text{ (dB)}$

2). Variable voltage gain (refer to the right figure).
 $G_v = 20 \cdot \log[R_1/(R_2 + R_f)] + 6 \text{ (dB)}$

如发生高频自激(电流声或发热严重),请调整此电容值,建议用: 224涤纶电容
 或104瓷片电容
 或去掉电容.

APPLICATION CIRCUITS

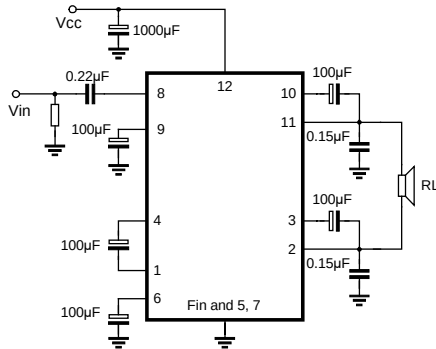


Fig. 5 Bridge Application

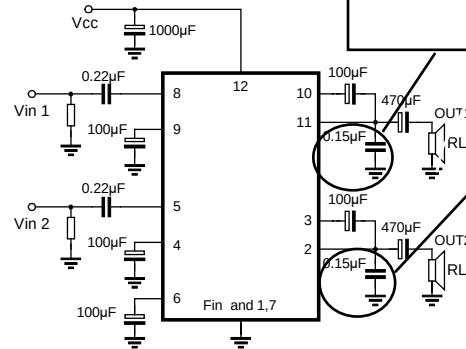


Fig. 6 Stereo Application